


Removing control unit


- 1 Disconnect battery.
- 2 Remove radio.
- 3 Carefully pull covering for controls at bottom (arrow) out of holders.
- 4 Unscrew two screws (62) and remove holding frame for control unit.



- 5 Remove control panel by pushing away holding pins (arrow).


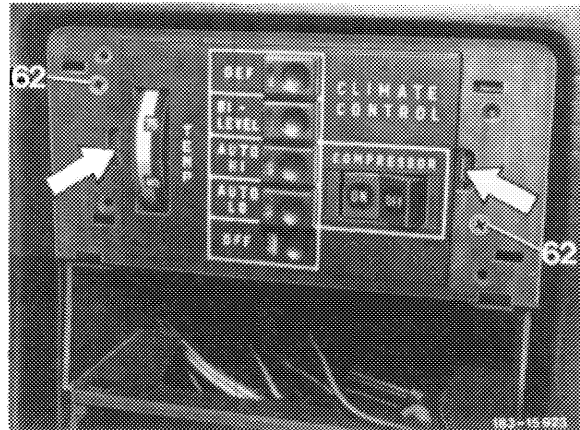


- 6 Pull electrical plug from optional switches and "ON/OFF" switch of refrigerant compressor (3) and remove switches.

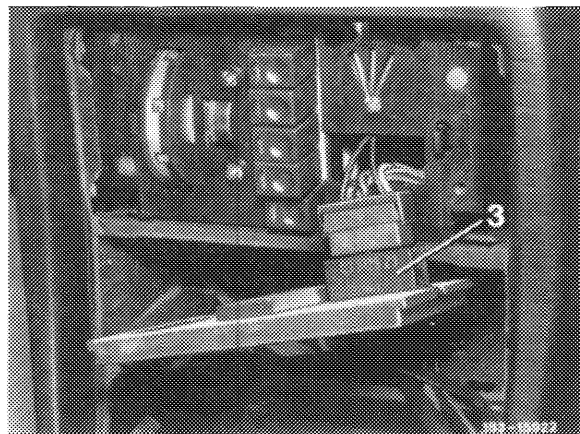


7 Remove center console (68–200).

8 Unscrew holder with control unit on air conditioner cabinet (arrow).

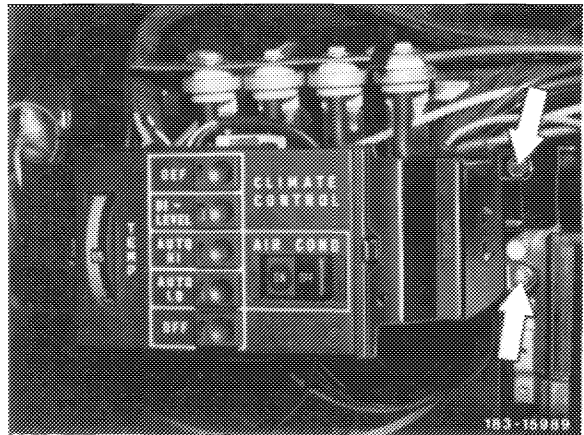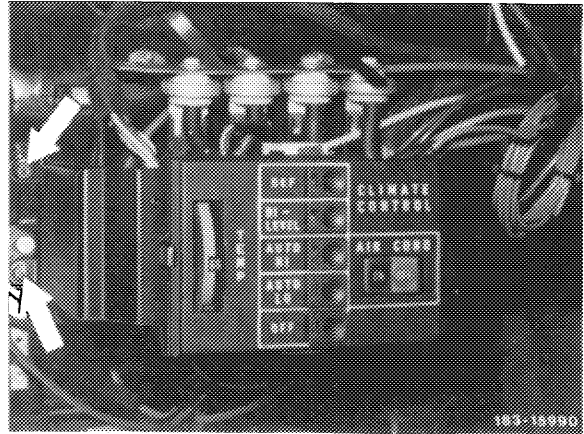


9 Pull electrical and vacuum plug connection, as well as lamps for lighting instruments from holder.

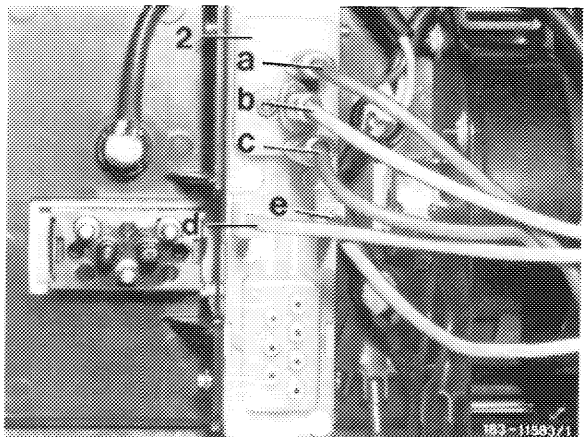

- | | |
|---------------------|---------------------|
| 2 Pushbutton switch | c Color code red |
| a Color code green | d Color code yellow |
| b Color code grey | e Color code blue |


Removing pushbutton switch

- 10 Pull off electrical flat plug.
- 11 Remove locks (54) and pull out holding pins (55).
- 12 Pull pushbutton switch (2) out of holder.

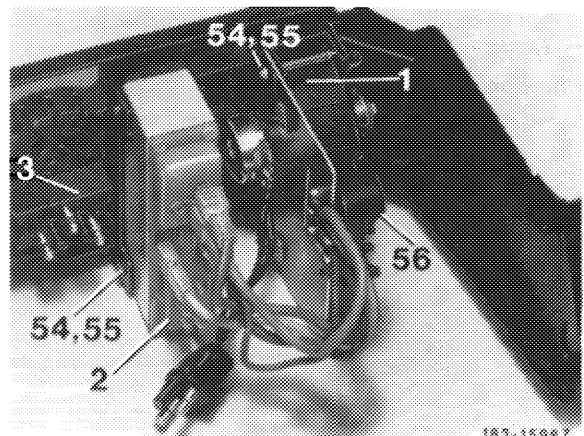


Installing pushbutton switch

- 13 Insert pushbutton switch (2) into holder and attach with holding pins (55).
- 14 Mount locks (54).
- 15 Attach electrical flat plug.

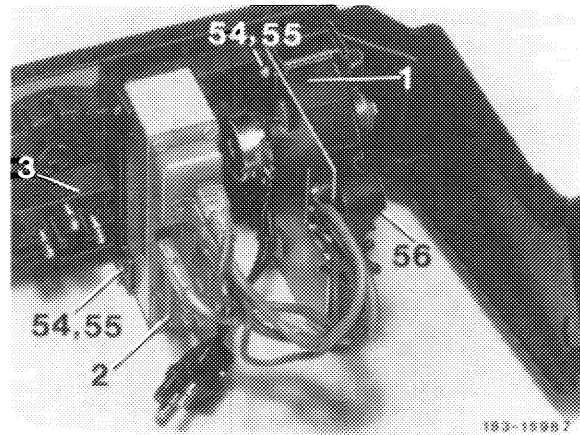

Removing temperature dial


- 16 Unscrew electrical plug (56) from holder.
- 17 Remove locks (54) and pull out holding pins (55).
- 18 Pull temperature dial (1) out of holder.

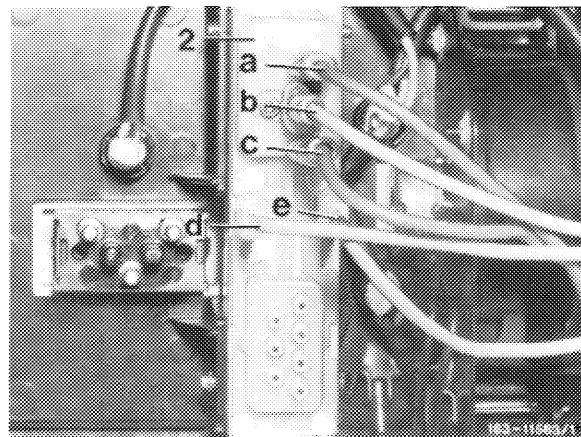

- | | |
|---------------------|---------------------|
| 2 Pushbutton switch | c Color code red |
| a Color code green | d Color code yellow |
| b Color code grey | e Color code blue |

Installing temperature dial

- 19 Insert temperature dial (1) into holder and attach with holding pins (55).
- 20 Mount locks (54).
- 21 Screw electrical plug (56) to holder.

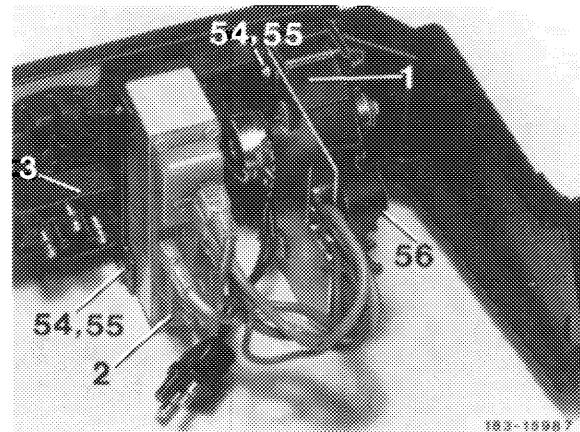


Removing and installing "ON/OFF" switch of refrigerant compressor

- 22 "ON/OFF" switch of refrigerant compressor is held in control panel by two spring clips. For removal, push switch at the rear out of control panel. Removal of center console is not required.



Installing control unit

23 Mount electrical and vacuum plug connection, as well as lamps for lighting control unit.

- | | | | |
|---|-------------------|---|-------------------|
| 2 | Pushbutton switch | c | Color code red |
| a | Color code green | d | Color code yellow |
| b | Color code grey | e | Color code blue |

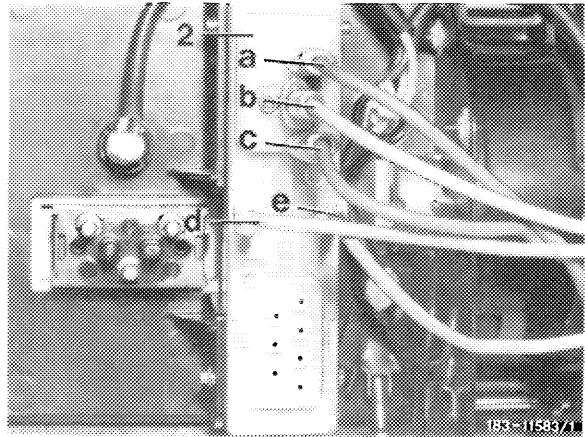

24 Screw holder for controls to air conditioner cabinet (arrow).

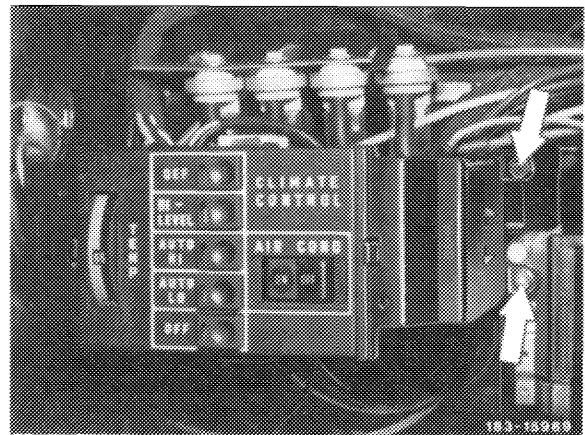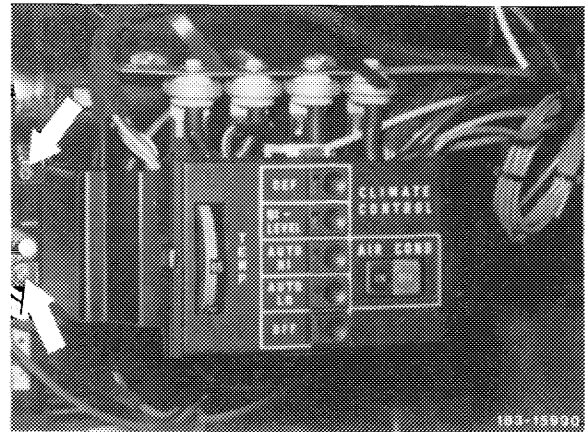

25 Install center console (68-200).

26 Mount electrical plug for "ON/OFF" switch (3) and optional switches.

27 Connect battery and test operation of all switches.

28 Mount operating panel, holding frame and covering for controls.

29 Install radio and check automatic climate control for operation.

