

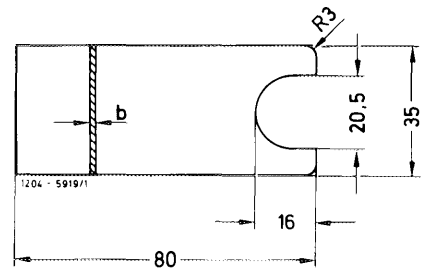


Self-made tools

Spacing plate
b = 1 mm

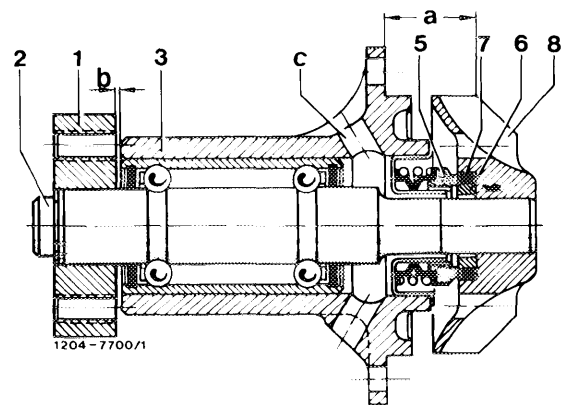


Installation sleeve

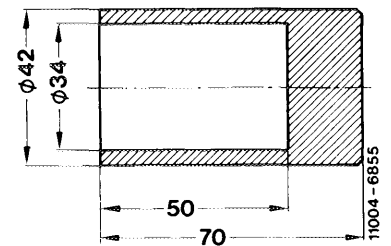


- | | |
|--|----------------|
| 1 Flange (attachment fan, hub ring and pulley) | 6 Counter-ring |
| 2 Coolant pump shaft with compact bearing | 7 Sealing ring |
| 3 Bearing housing | 8 Impeller |
| 4 Slide ring sealing | a 22.8–23.2 mm |
| | b 2 mm |
| | c Vent bores |

Disassembly

1 Support bearing housing with pertinent tubing and press-out coolant pump shaft by means of a mandrel.

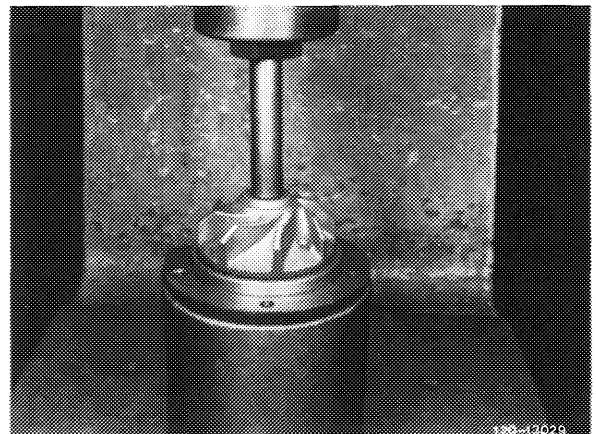


2 Apply light hammer blows at several points between bearing housing and sliding ring seal to cancel the preload and force sliding ring seal out.

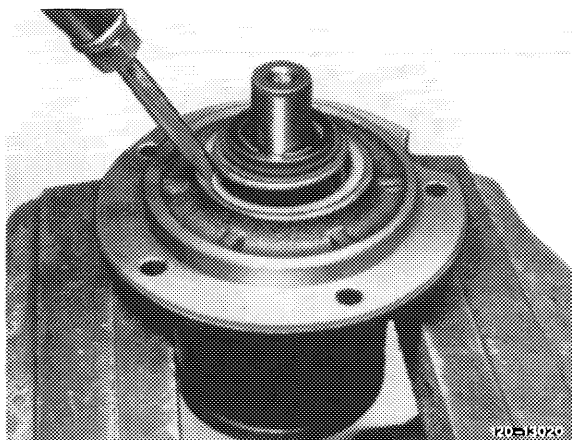

3 Force counter ring out of impeller.

Note: Replace coolant pump shaft with compact bearing and flange following disassembly on principle.

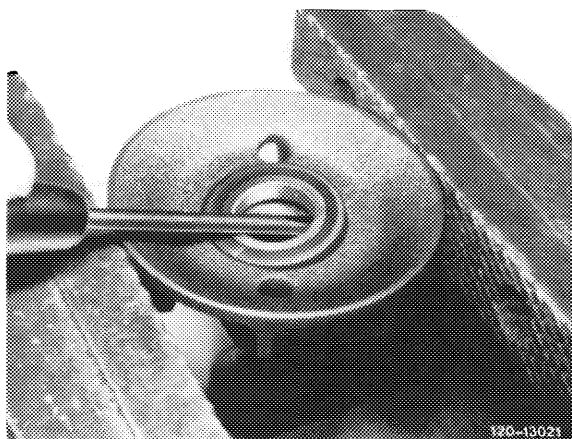


Assembly

4 Force-in new compact bearing flush with bearing housing by means of a tube positioned against outer race.

Attention!

Do not press against coolant pump shaft.

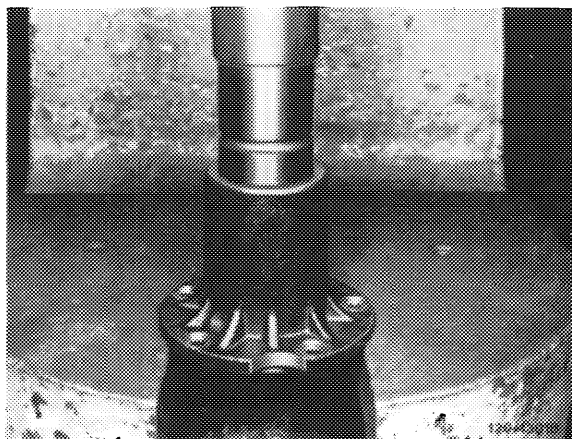


5 Lightly coat mounting bore of sliding ring seal in bearing housing with sealing compound (part No. 001 989 25 20).

Force-in or knock-in sliding ring seal with pressing-in sleeve.


Attention!

Support only against bearing housing and not against coolant pump shaft.

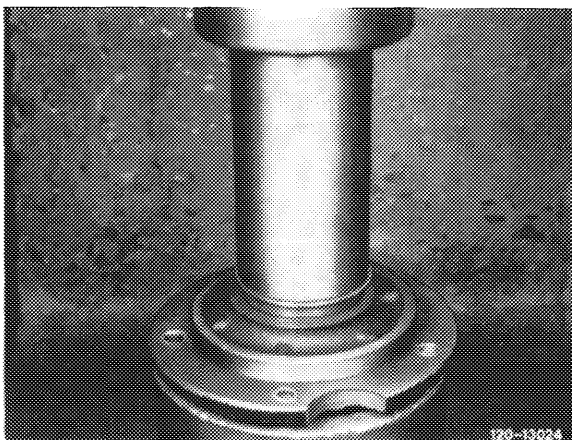

6 Coat O-ring on counter-ring with brake cylinder paste and push with chamfered side (arrow) into thoroughly cleaned receiving bore in impeller.


7 Clean sealing surfaces of counter-ring and sliding ring seal dust-free using a chamois cloth.

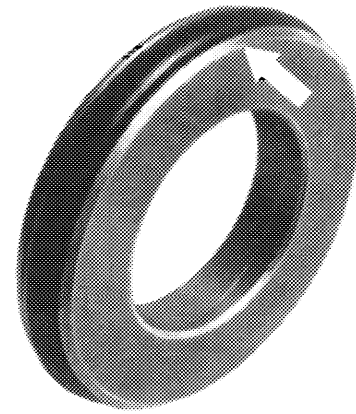

120 - 10863

8 Degrease both shaft studs of coolant pump shaft and bore in impeller.


9 Press-on impeller flush with coolant pump shaft, while supporting coolant pump shaft.

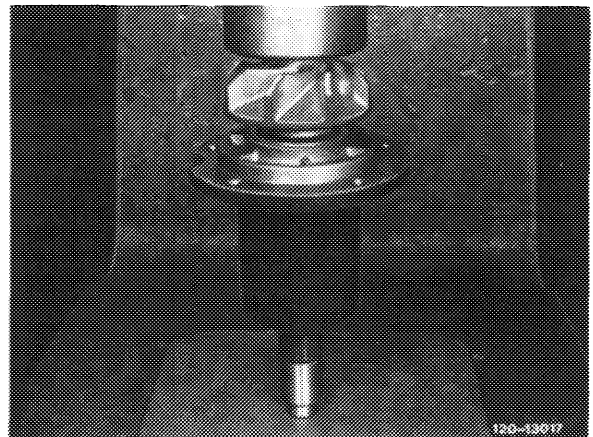

120-13017

10 Heat flange on a hot plate up to approx. 300 °C (annealing color dark -- up to light blue).

Place heated flange on a recessed base. Hold spacing plate on coolant pump shaft, slip coolant pump shaft on bore of flange and apply a blast of compressed air against flange. Wait for a few seconds until flange is firm and then immediately cool in water bath.

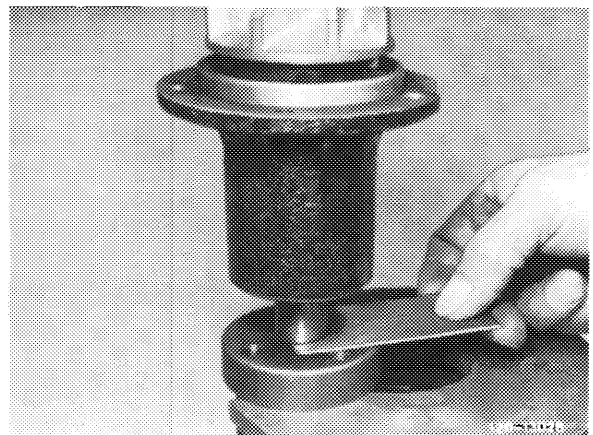

120-13017