


**Removal**

---

1 Remove cover under instrument panel on driver's side.

2 Pull harness from switch (arrow).

3 Loosen switch (arrow) and remove.

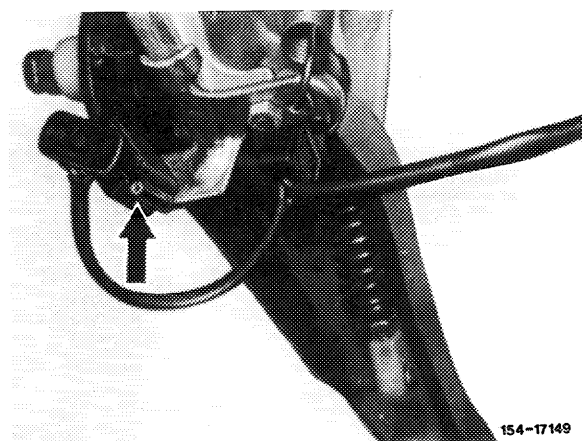

**Installation**

---

4 For installation proceed vice versa.

5 Perform function test on road.