



Removal

- 1 Remove screw on cover.

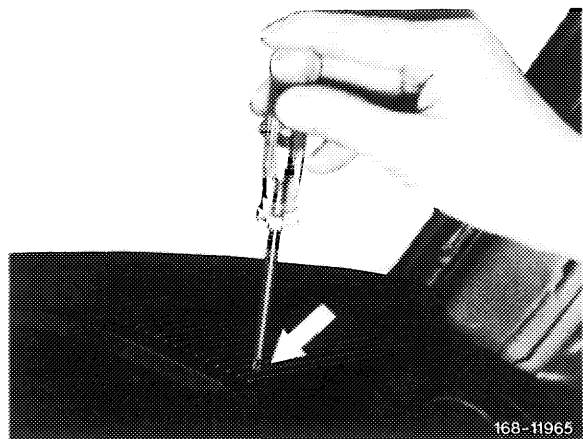

- 2 Lift cover a little and swing toward center of car just enough, that the side hook disengages at the instrument panel.

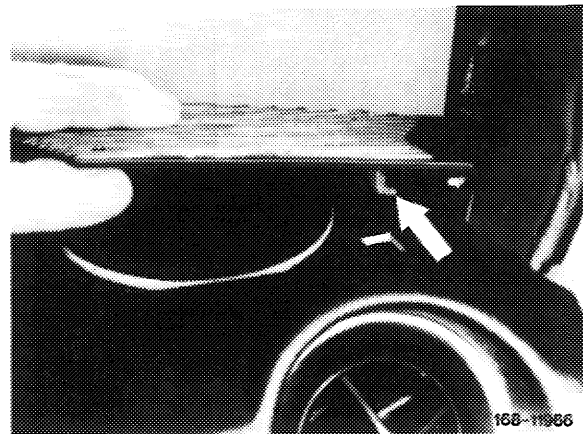

- 3 Tilt cover forward, so that the cam can be pulled out of opening in instrument panel.

Installation

- 4 Install in reverse sequence.

Note: Instrument panel must be counterheld from below in area of front cam, if necessary to have it engage.

