


A. Sedan

**Removal**


---

- 1 Press off edge guardstrip in area of rear pillar trim with a plastic wedge.

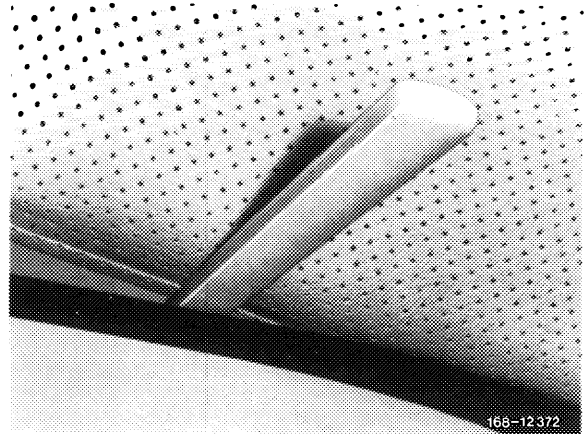


- 2 Press the three plastic hooks out of holder from the outside with a plastic wedge.

**Note:** Do not press off trim from inside, since this could damage the plastic hooks.

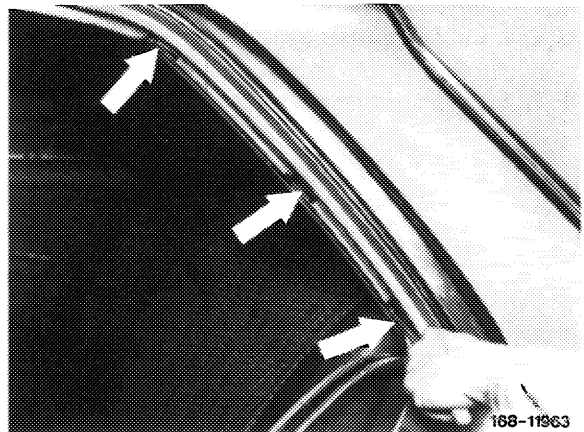

- 3 First unclip trim along top and then pull out forward.

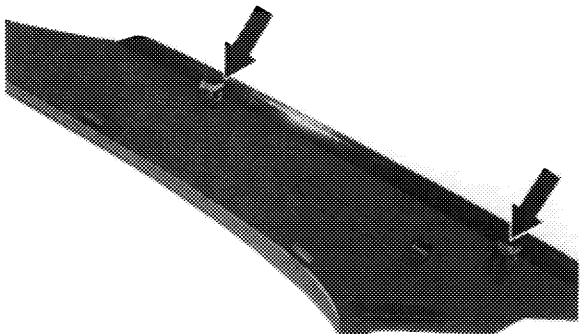

**Installation**

---


- 4 Install in reverse sequence.

## B. Coupe


### Remove

---

1 Push sealing strip in the area of the trim panel behind the trim panel by means of a plastic wedge.

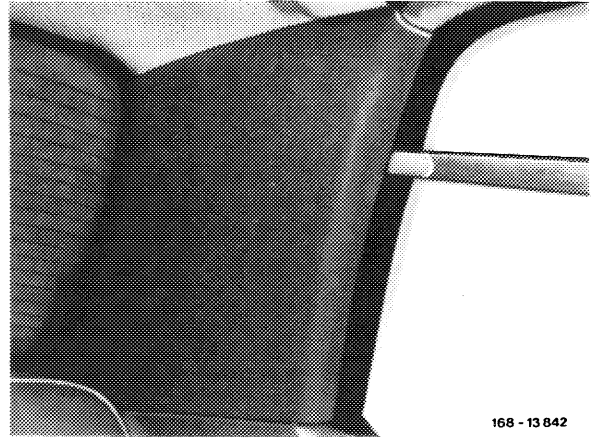


2 Pull trim panel front rearwards towards the center of the vehicle and out of the two clips.

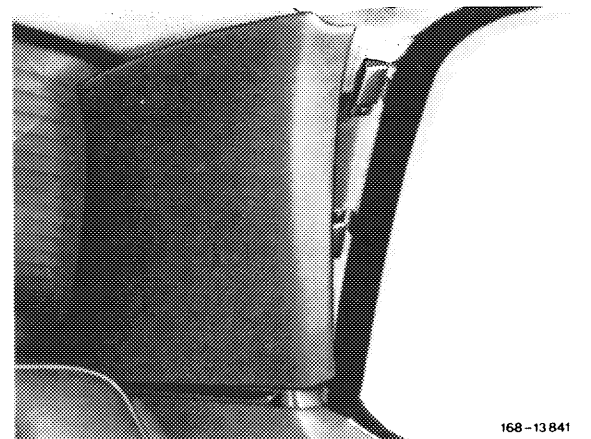

3 Lift trim panel rear upwards and out of the rear column and rear quarter panel.

4 Pull trim panel forward and out of the parcel shelf.

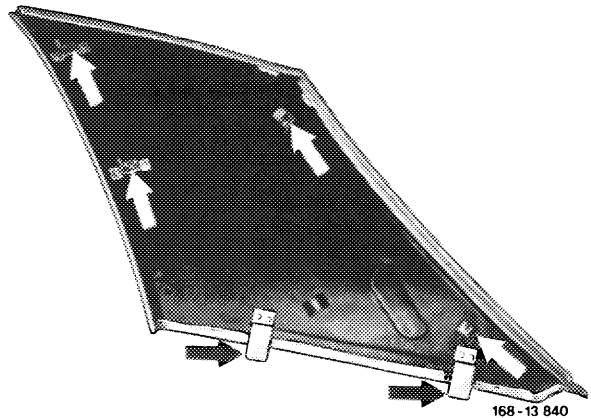

### Install

---

5 Installation takes place in reverse order, ensure that the clips are properly seated in the recesses provided at the rear column.

