



### Removal

---

- 1 Press off cap downward and unscrew bolt on side member.
- 2 Remove both screws from bottom of cover.
- 3 Pull trim down off of center pillar.

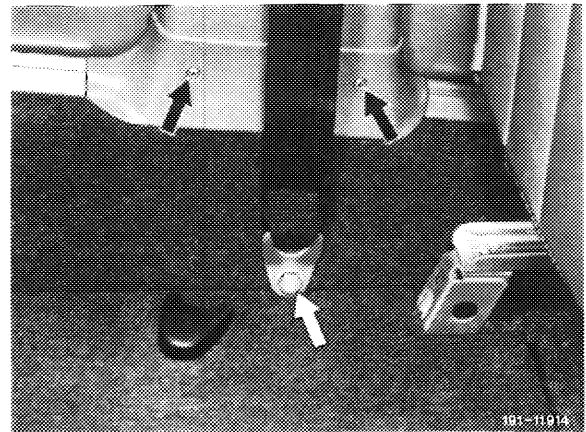

- 4 Guide belt strap with tongue through opening in trim.

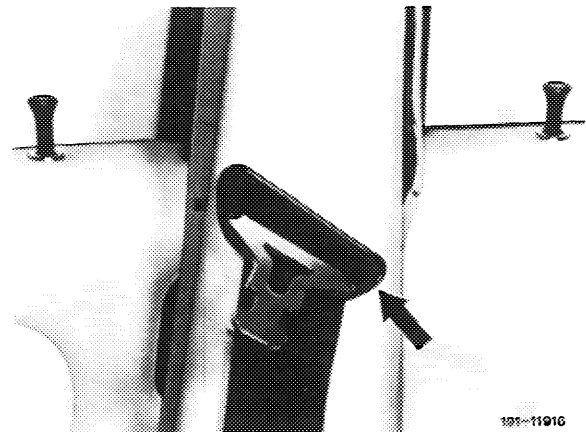

### Installation

---

- 5 Install in reverse sequence.