



A. Standard equipment

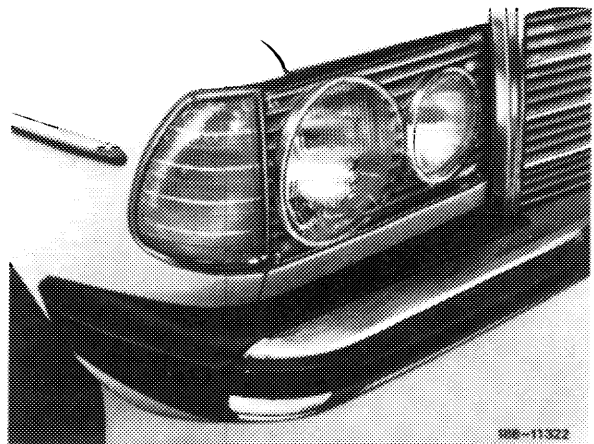


Removal

- 1 Unscrew nut at left and right on bracket and pull out bumper including bracket in forward direction.

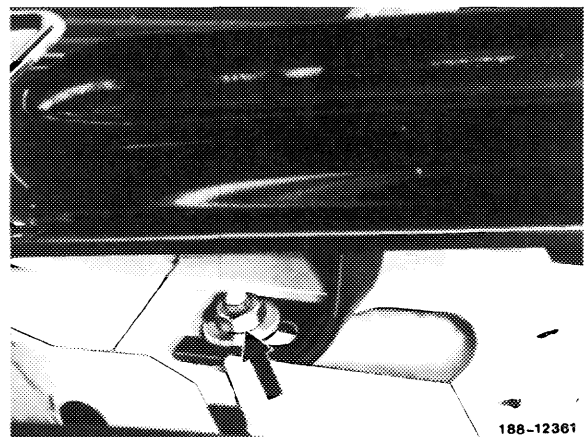


Installation

- 2 Moisten lateral rubber cover with soapy water or the like.
- 3 Introduce bumper into guide bracket in rubber cover.
- 4 Position the two fastening nuts and tighten.

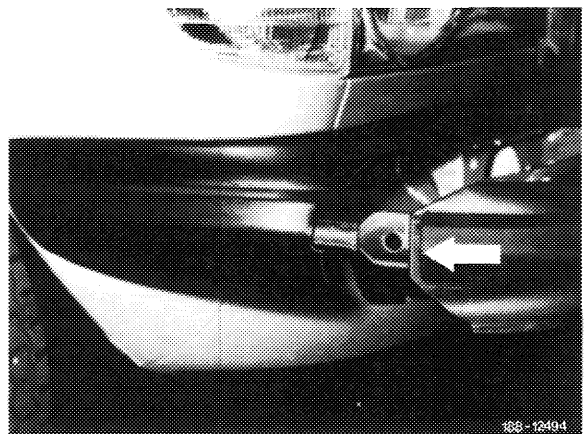


B. De-luxe equipment

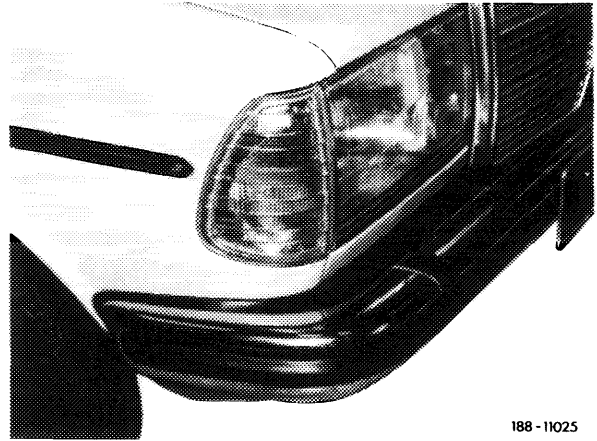

188 - 11025

Removal


- 1 Unscrew nut at left and right on bracket and pull out bumper including bracket in forward direction.

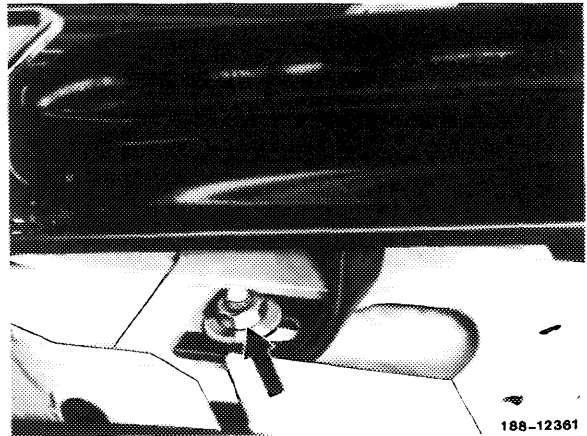

188-12361

Installation

- 2 Introduce bumper into guide bracket laterally on front fender.
- 3 Position the two fastening nuts and tighten.

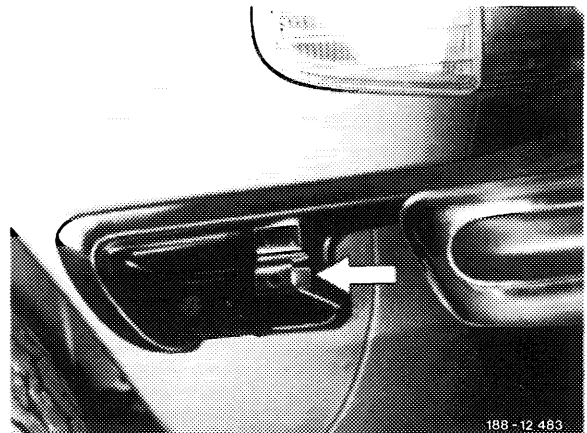

188 - 12 483