


A. Sedan standard equipment

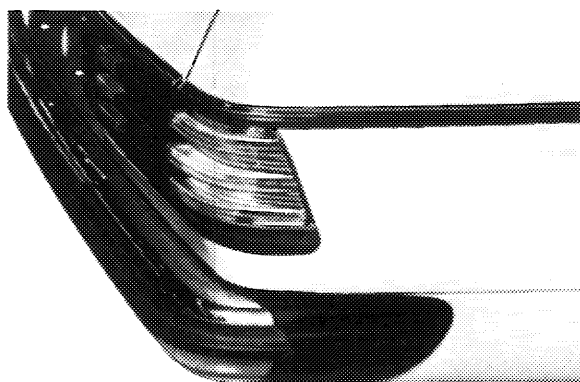


188-11028

**Removal**

---

1 Unscrew fastening nuts left and right on bracket and pull out bumper including bracket toward the rear.

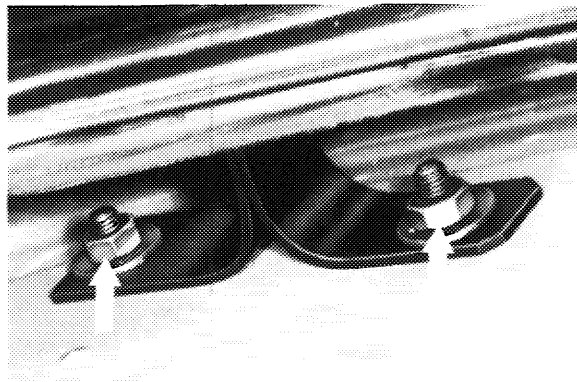


188-12362

**Installation**


---

- 2 Moisten rubber cover with soapy water or the like.
- 3 Introduce bumper into guide bracket in the rubber cover.
- 4 Position fastening nuts and tighten.

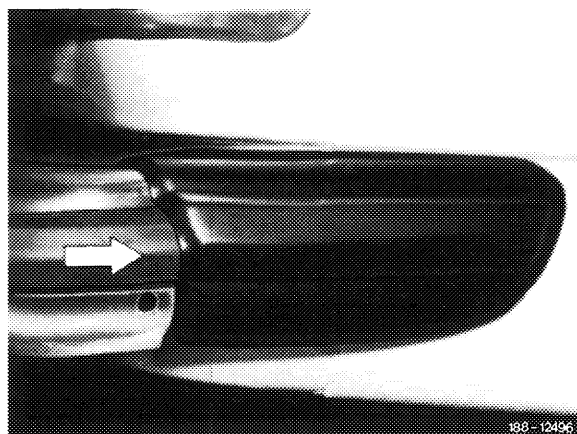

188-12496

## B. De-luxe equipment

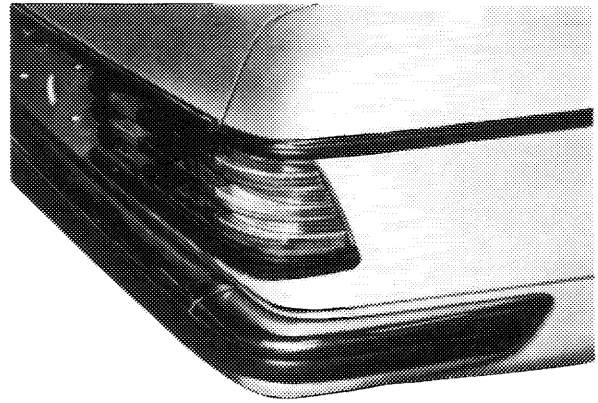


188-11027

### Removal

---

- 1 Unscrew fastening nuts left and right on bracket and pull out bumper including bracket toward the rear.

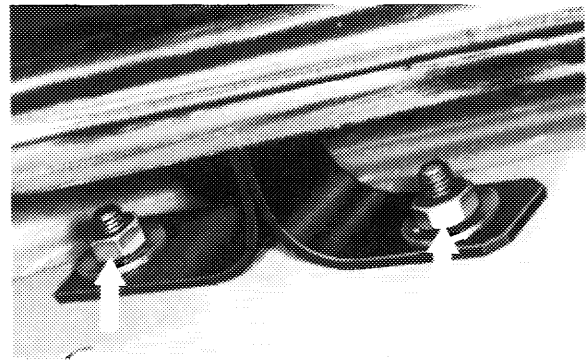


188-12362

### Installation

---

- 2 Introduce bumper into guide brackets on rear fenders.
- 3 Position fastening nuts and tighten.

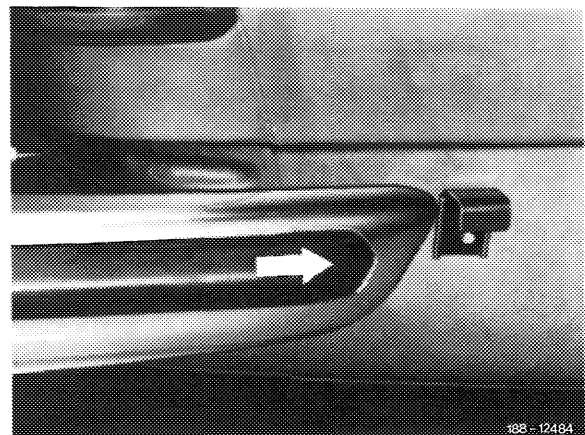


188-12404

## C. T-Sedan

### Removal


---

- 1 Remove light panel on back-up lamp and fog lamp.

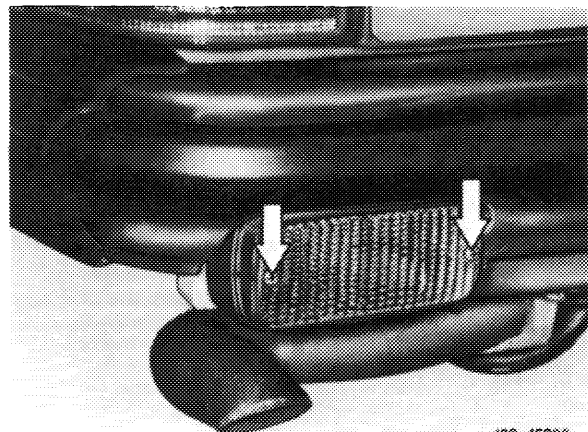


188-15803

2 Pull reflector on back-up lamp and on fog lamp from lamp housing and pull off the two cables.

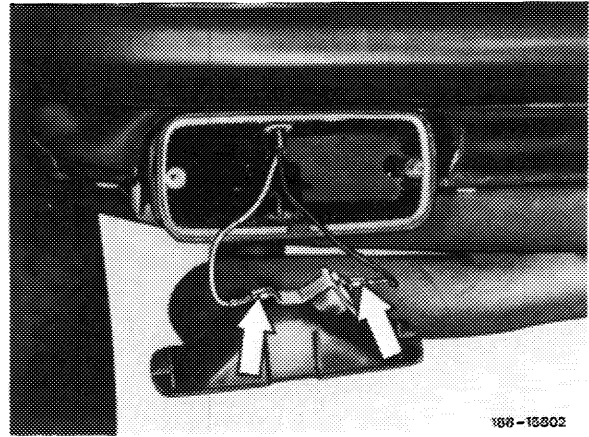

3 Unscrew fastening nut on bumper bracket left and right and pull out bumper toward the rear.

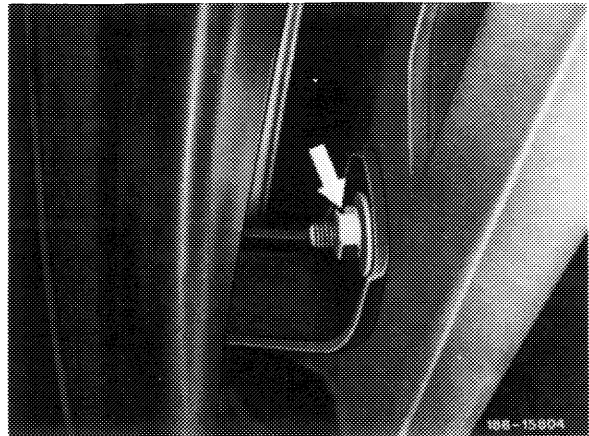

### Installation

---

4 For installation proceed vice versa.