

**Preparation for test**

---


1 Remove cover at front right under instrument panel (68-150).

**Connecting tester**

---

3 Connect vacuum line (4) to black vacuum line (37), while removing blind seal.

- |                               |                               |
|-------------------------------|-------------------------------|
| 1 10-point plug connection    | 6 Mode switch                 |
| 2 Volt or ohmmeter needle     | 7 Vacuum measuring instrument |
| 3 Connection (vehicle ground) | 8 Voltmeter                   |
| 4 Vacuum line                 |                               |
| 5 Voltmeter switch            |                               |

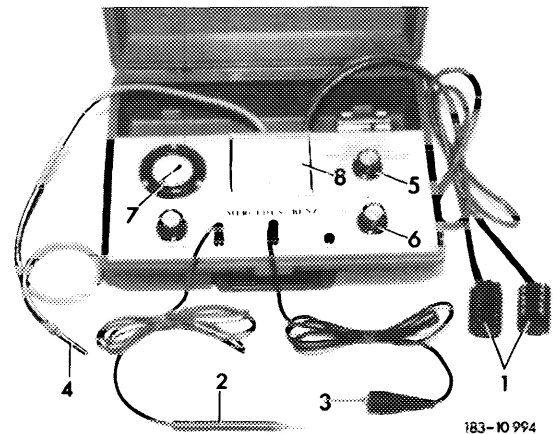

4 Connect the two 10-point plugs (1) of tester with plug connection (5).

5 Connect connection (3) of tester to vehicle ground (seat rail).

**Layout of 10-point plug connection for tester**

- |                                       |
|---------------------------------------|
| 5 10-point plug connection for tester |
| 9 Blower                              |
| 36 Vent line for legroom flaps        |
| 37 Vacuum connection for tester       |

