


### Removal

---

- 1 Remove coupe top.
- 2 Open top well lid.
- 3 Remove screws (1 and 2).
- 4 Remove covering.

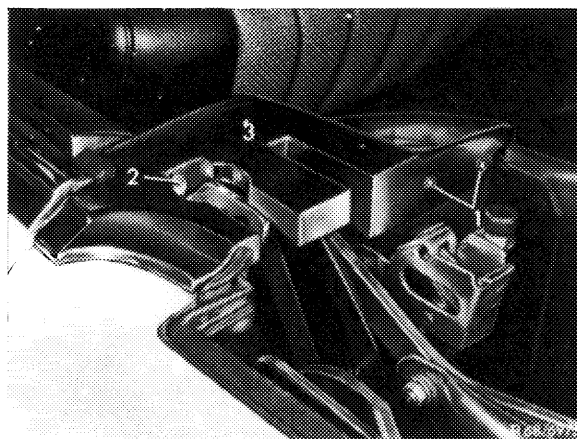

### Installation

---

- 5 For installation proceed vice versa.

**Note:** Match covering to top well lid.