


Removal

- 1 Remove door lining (72–100).
- 2 Remove armrest with grip (72–140).
- 3 Remove screw (1) from under door heating duct.
- 4 Fold door pocket downwards and thereby disconnect from hooks (2).

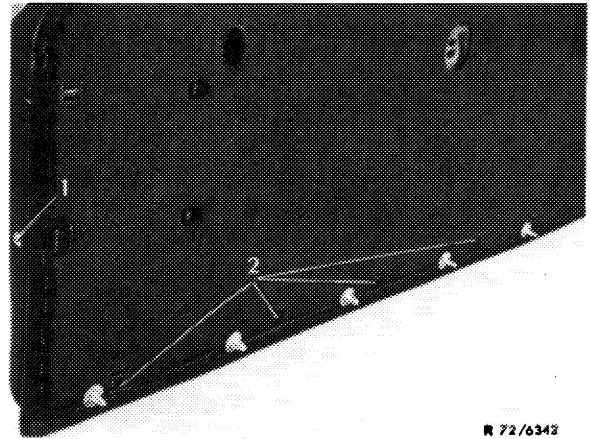

R 72/0342

Installation

- 5 For installation proceed vice versa.