

75–102 Removal and installation of trunk lid lock and snap lock

Removal


Up to the following chassis end numbers, remove trim strip on snap lock first (68–500).

This will permit removal of snap lock from trim strip.

Model	Chassis End No.
107.023	001 286
107.043	007 743
107.044	005 296

Starting with these chassis end numbers, proceed as follows:

- 1 Remove fastening strip for carpet lining left and right.
- 2 Pull off carpet lining in range of lock lower half (2).
- 3 Unscrew screws (1) and remove lock lower half (2).
- 4 Unscrew the two fastening screws for snap lock and pull snap lock out in forward direction through rear center panel.

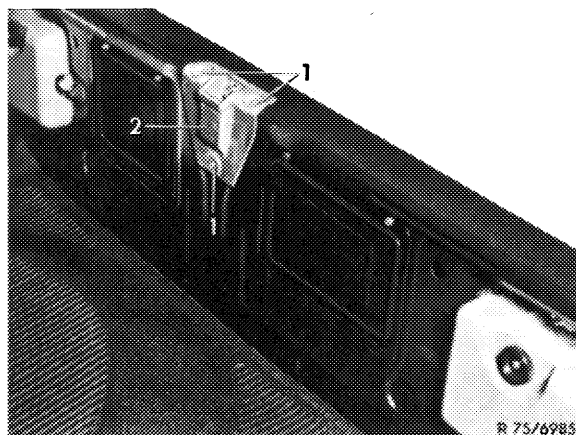

Installation

For installation proceed vice versa.