


77–330 Removal and installation of top lock on top of frame

Removal

- 1 Open top and fold back.
- 2 Remove both screws on lock (1).
- 3 Remove lock (1).

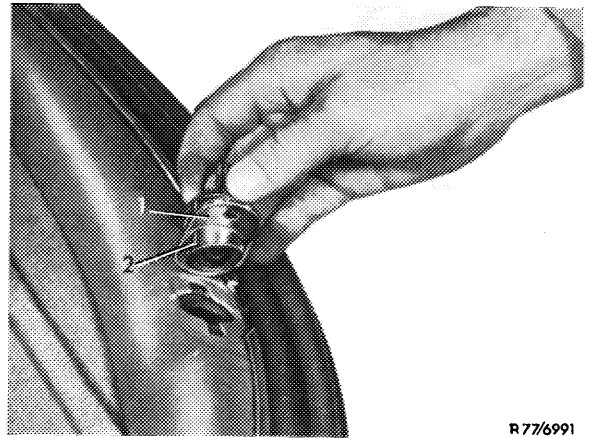

R77/6991

Installation

- 4 For installation proceed vice versa.

Caution! The high end (2) of the top lock (1) should face toward the rear.

Note: The lock is marked left and right.