


Removal

- 1 Loosen both Phillips head screws (1) and pull off front part (2) of headlamp.
- 2 Loosen spring clip (3) and swivel to the right. Remove Halogen bulb (4) and loosen plug connection (5).

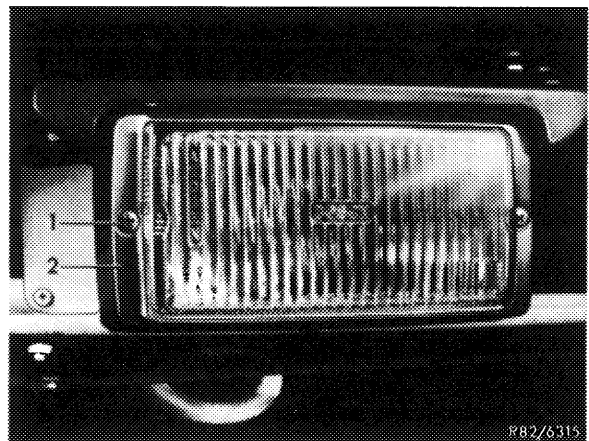

Installation

- 3 For installation of new bulb proceed similarly in vice versa sequence. Pay attention to correct location of rubber sealing frame (6).

Note: During installation of bulbs, pay attention to correct seat of locating pins.

Handle new bulb with tissue paper or the like only.

Insert only bulbs with specified number of watts.

