



**Removal**

1 Unscrew knurled nuts (2). Remove lamp carrier (1) and pull off coupling for electric connections.

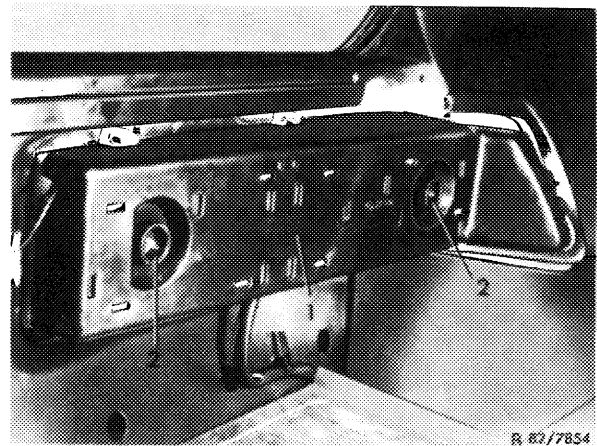

2 Unscrew fastening nuts (1). Remove housing in inward direction, light window with gasket in outward direction.

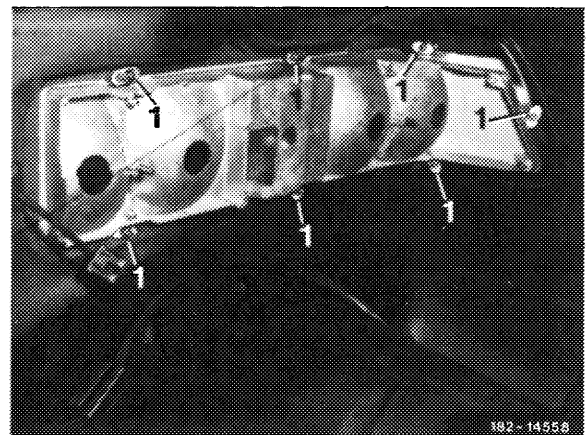

**Installation**

3 For installation proceed vice versa.

Cable layout of couplings

**Left**

- 1 vacant
- 2 brown
- 3 black/white
- 4 gray/yellow
- 5 black/red
- 6 gray/black
- 7 vacant
- 8 gray/green

**Right**

- gray/violet
- brown
- black/green
- gray/yellow
- black/red
- gray/black
- vacant
- vacant

