

Brakes

Front wheel brake, model 107

Four-piston fixed calipers with 40 mm piston dia. are installed. The opening for the brake pads is the same as before (90 mm).

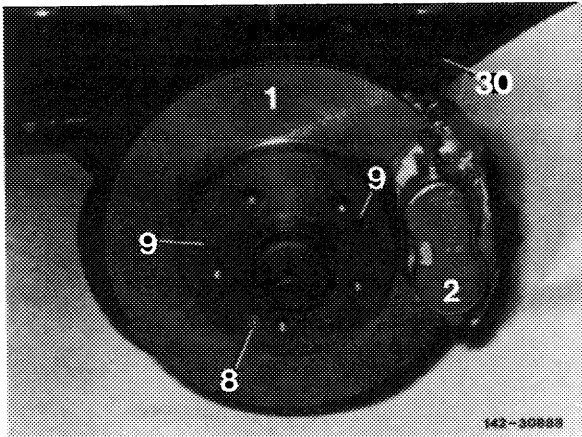


Fig. 42/1

The 4-piston fixed caliper has one bleed screw at the inside and one at the outside.

When bleeding the brake system, remove the front wheels so that the outer pressure chamber can also be bled.

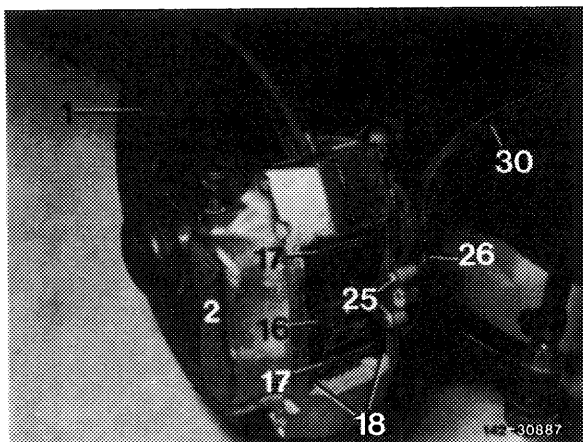


Fig. 42/2

The diameter of the brake discs is 284 mm.

The same brake discs are installed in models 124.030 and 201.034.

Tandem master cylinder, model 107

The tandem master cylinder with central check valve is made of light alloy. The diameter for the primary circuit is 25.4 mm, for the secondary circuit 19.1 mm.

Brake booster, model 107

Stepped double-diaphragm brake booster of light alloy construction. Diameter of diaphragms: 8/9".

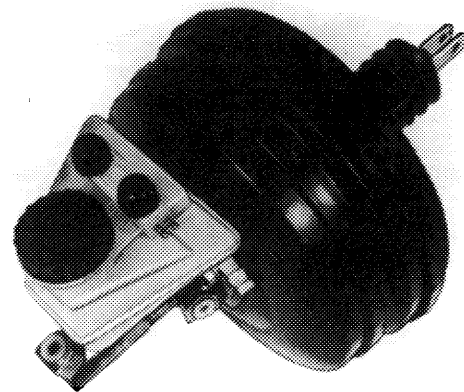


Fig. 42/3