

**Preparation for test**


---

- 1 Remove glove box (68-140).

**Connecting tester**

---


- 2 Connect vacuum connection line (4) to black vacuum line (37) while removing blind seal.
- 3 Connect the two 10-point plugs (1) of tester to plug connection (5).
- 4 Connect connection (3) of tester to vehicle ground (seat rail).

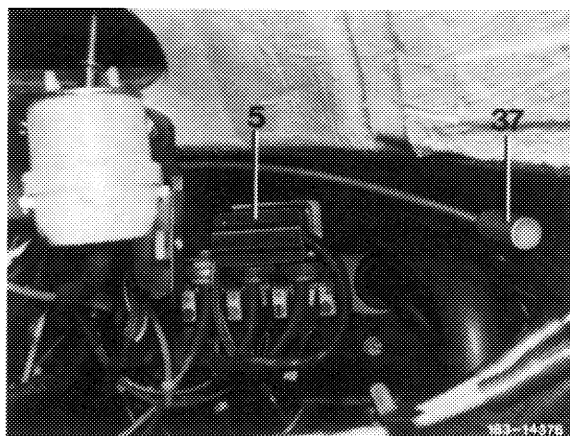

Layout 10-point plug connection for tester

- 5 Plug connection for tester
- 37 Vacuum connection for tester

- |                               |                               |
|-------------------------------|-------------------------------|
| 1 10-point plug connection    | 5 Voltmeter switch            |
| 2 Volt or ohmmeter needle     | 6 Mode switch                 |
| 3 Connection (vehicle ground) | 7 Vacuum measuring instrument |
| 4 Vacuum connection line      | 8 Voltmeter                   |

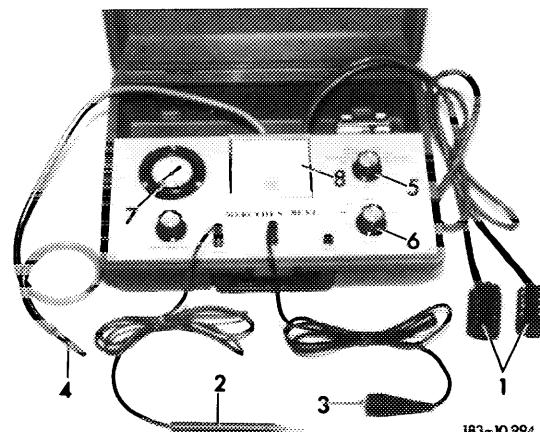

183-10 994