


Supplement C
Changes as of Model Year 1987



Model 107

2-Function refrigerant pressure switch

To prevent damage to the A/C compressor, a 2-function refrigerant pressure switch (S 31/1) is installed in the receiver/dryer replacing the previous switch.

1. Function 1 (low pressure) activates if the refrigerant level is too low or with no refrigerant in system.

Cut-out pressure is approx. 2.0 bar.

Cut-in pressure is approx. 2.6 bar.

2. Function 2 (high pressure) activates if the expansion valve becomes clogged or if the auxiliary fan fails to operate.

Cut-out pressure is approx. 30.0 bar.

Cut-in pressure is approx. 22.0 bar.

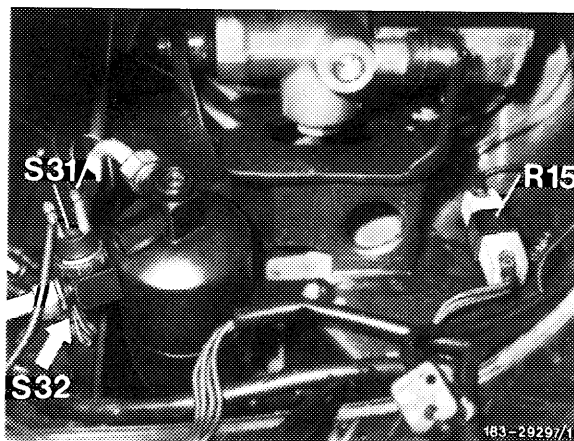


Fig. 83/3

S 31/1 2-Function refrigerant pressure switch