



All models


Retighten bolts on slip joints or flanged connections. Torque to 20 Nm.

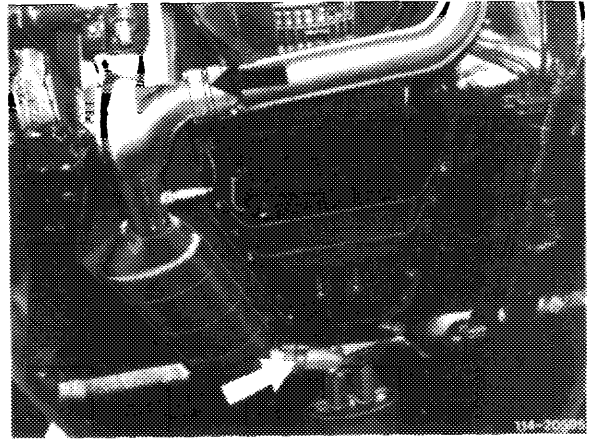


Model 107.025/045; 107.048 similar (no rear flange)

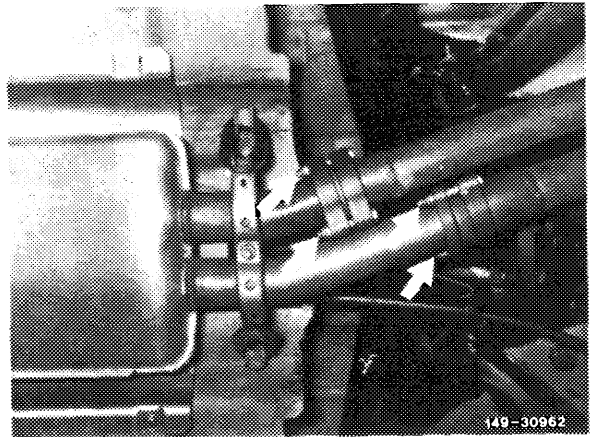


Model 107.048

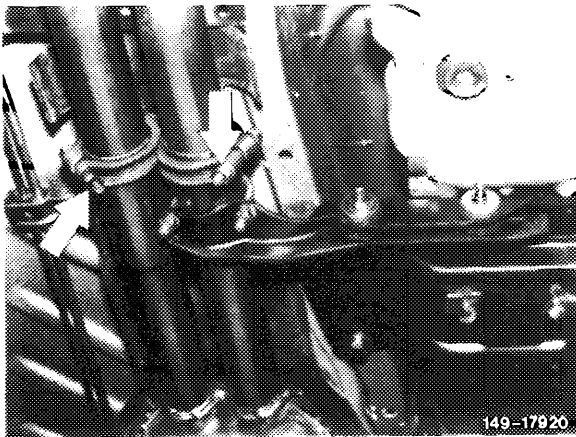


Model 123.03/05

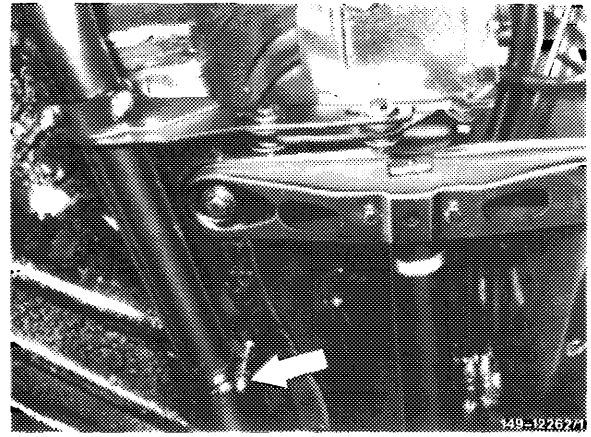


Model 123.123/130/150/190

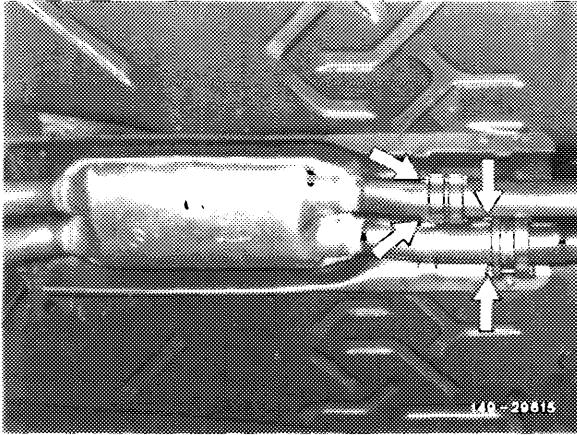


Model 124.026/030/05/09/2, 126.02, 201.029/034

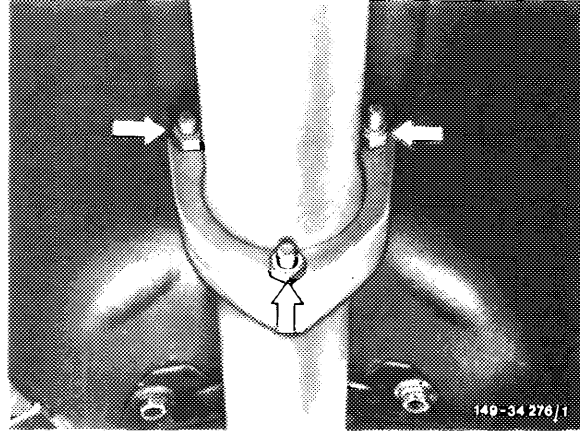


Model 124.133/193, 126.1, 201.128

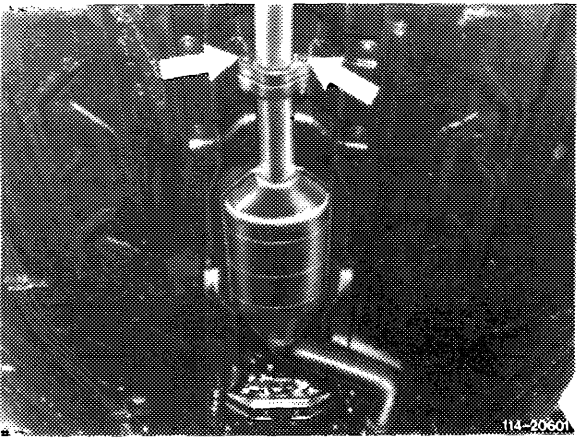


Model 126.03/04 up through 09.1985

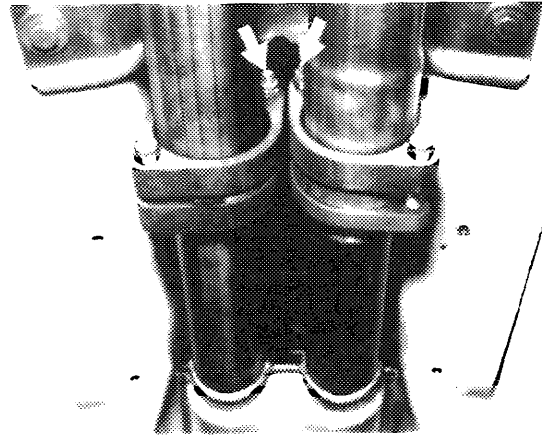


Model 126.03/04 as of 09.1985

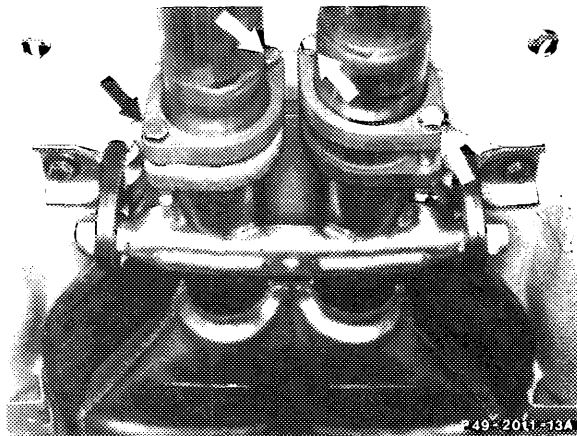


Model 129

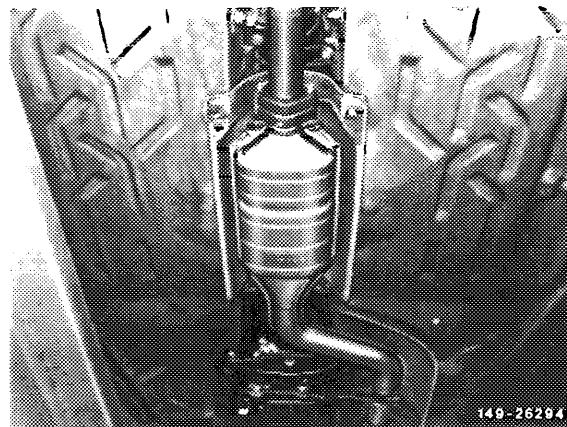


Model 201.024/028

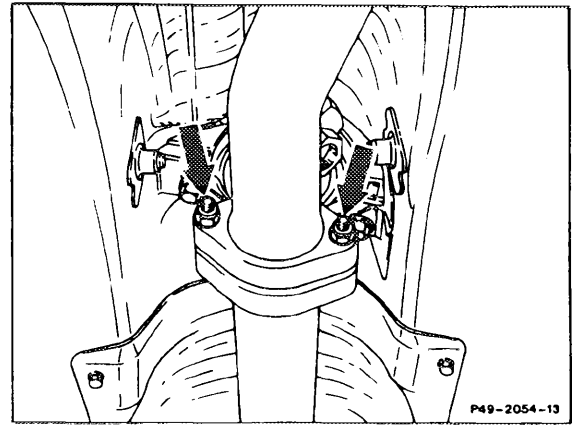


Model 201.122/126

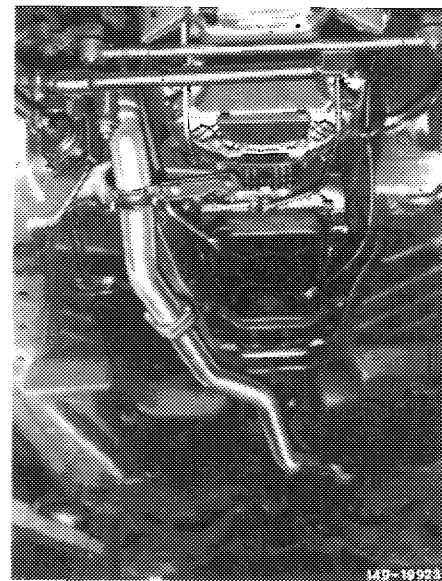

Model 123.133/153/193

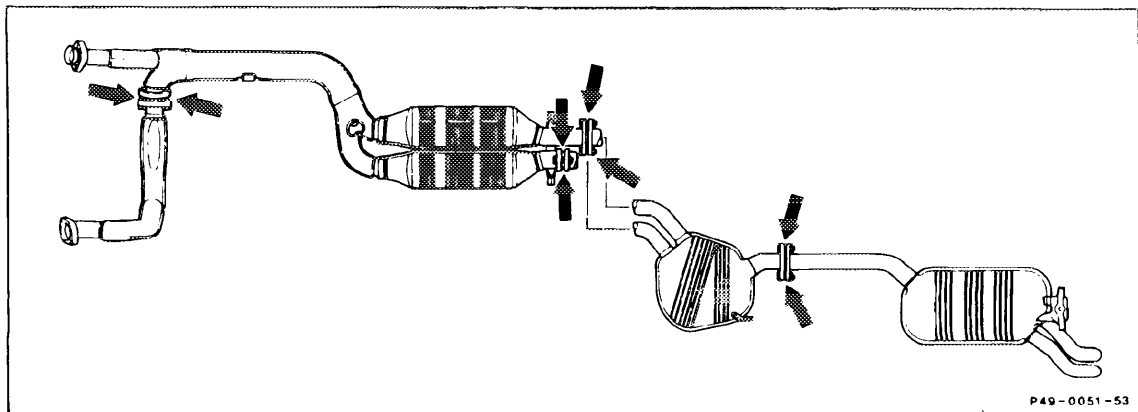


Model 124.034/036

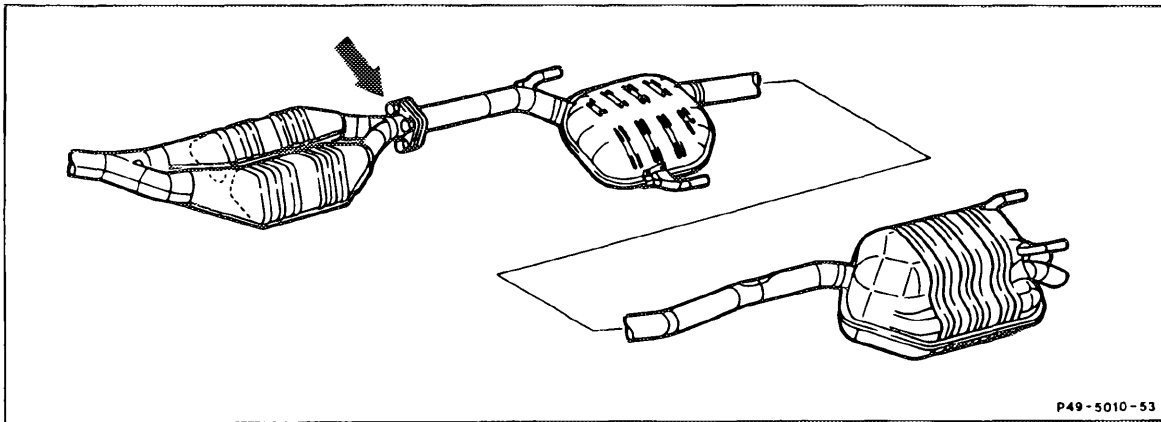


P49-5010-53

Model 140.03

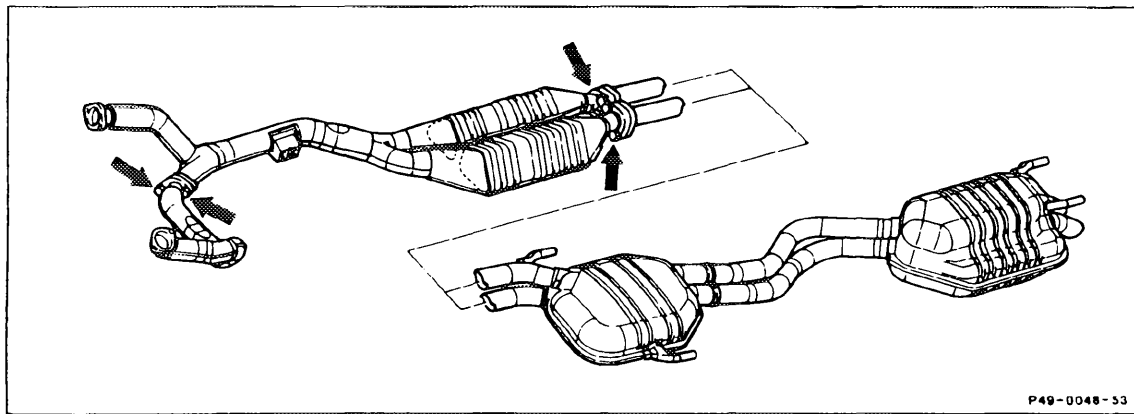

P49-0048-53

Model 140.042/051

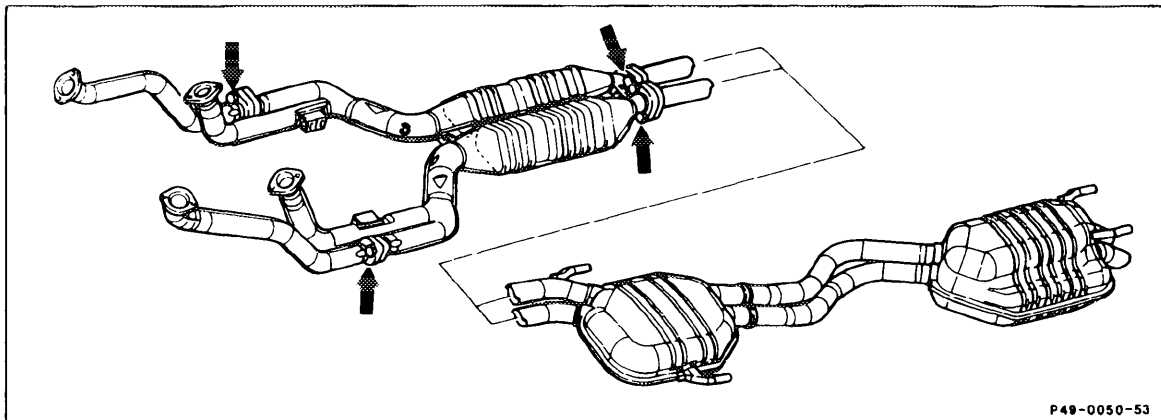

P49-0050-53

Model 140.057